


Anti-static  
glass option  
available

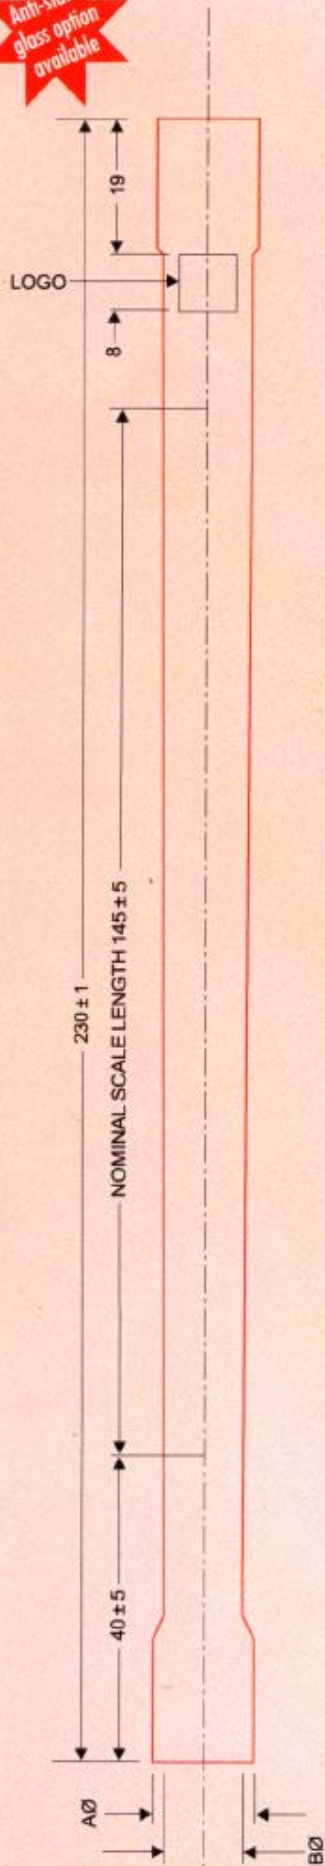

# ANAESTHETIC ROTAMETERS

## Variable Area Flowmeters

Solutions for Veterinary Anaesthesia



Calibration scale

Calibrated at 20 deg C / 1013 mbar abs

Code	Gas	Scale	AØ ± 0.4	BØ ± 0.1
O110.XX	Oxygen	0.1 - 10 L/M	15 mm	11.3 mm
O105.XX		0.1 - 5 L/M	15 mm	11.3 mm
O101.XX		0.1 - 1 L/M	10 mm	6.3 mm
A015.XX	Air	1 - 15 L/M	15 mm	11.3 mm
A115.XX		0.1 - 15 L/M	15 mm	11.3 mm
N112.XX	Nitrous Oxide	0.1 - 12 L/M	15 mm	11.3 mm
N105.XX		0.1 - 5 L/M	15 mm	11.3 mm
N101.XX		0.1 - 1 L/M	10 mm	6.3 mm

Other specifications can also be met.

- Conforms to ISO 5358.
- Customised to OEM requirement.
- Single / Dual taper.
- Permanent ceramic markings fused to glass.
- Bobbin float: aluminium alloy anodised red, with silver dot for easily observing rotation.
- Special design float for rapid response to flow change.
- Machine manufacturers' logo printed if required.



**CM Flowmeters (India) Pvt. Ltd.**

Plot 2 Phase III Kasba Industrial Estate EM Bypass Kolkata 700 107 INDIA  
Phone 91 33 2442 1456 2443 0201 Fax 91 33 2443 0201  
Email cmflowmeters@vsnl.net URS : www.cmflowmeters.com

